

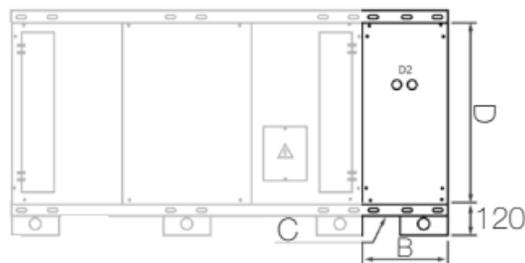
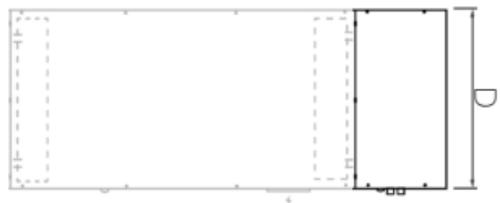


External direct expansion heating/cooling module

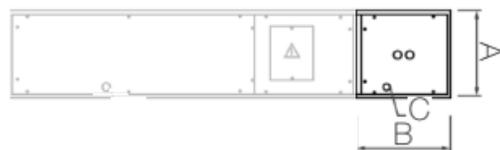

- External module directly connected to the unit on air supply/return side.
- 3-row direct expansion module suitable for R410A.
- Complete with aluminum dray tray.

Description	A	B	C	D	Cooling capacity ⁽¹⁾ (kW)		Heating capacity ⁽²⁾ (kW)	Air pressure drop ⁽¹⁾ (Pa)	ODS connect.	Weight (kg)
					tot	sens				
CDX-H 05	330	350	1/2" M	680	2,51	1,41	3,33	51	8/8	28
CDX-H 10	370	400	1/2" M	820	4,36	2,44	5,71	53	12/16	31
CDX-H 15	455	400	1/2" M	1030	7,13	3,99	9,22	54	12/16	35
CDX-H 20	455	400	1/2" M	1460	10,94	6,13	13,90	50	12/16	42
CDX-H 30	590	502	1/2" M	1460	16,11	9,02	20,36	50	16/22	52
CDX-H 40	590	502	1/2" M	1840	21,22	11,88	26,50	55	22/28	58

⁽¹⁾ air inlet condition 28,0°C 60% RH; evaporating temperature 8°C.

⁽²⁾ air inlet condition 13°C; condensing temperature 45°C.

Dimensions in mm