


Adjusting damper

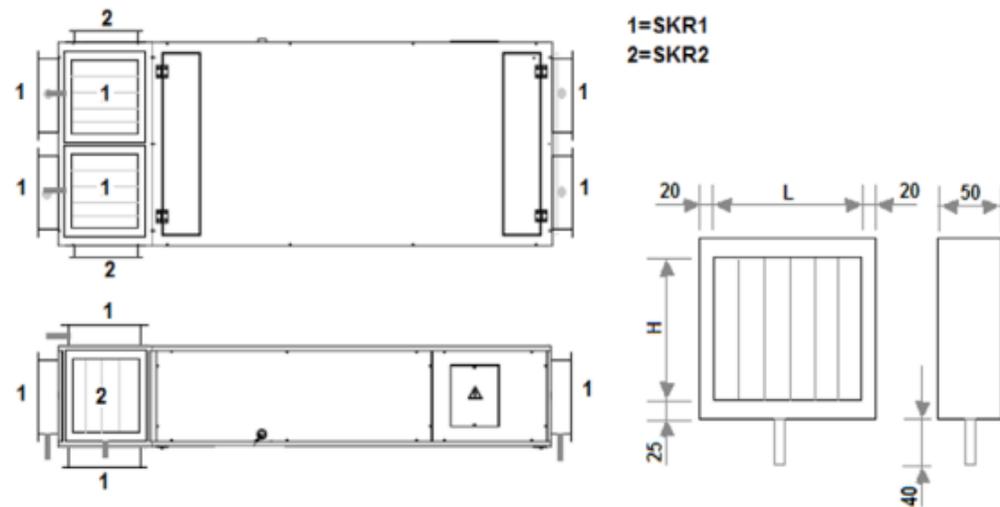

- Frame and aluminum opposing blades controlled by on/off electrical actuator SSE (on request).
- Can be coupled directly on the air inlets of the unit, of the PLM plenum or CCS/CDX modules (select the SKR1 or SKR2 type make in reference to the drawing alongside).

Description	L	H	Weight (kg)
SKR1 05	250	230	1,6
SKR1 10	290	270	2,1
SKR1 15	370	355	2,6
SKR1 20	610	355	3,7
SKR1 30	610	490	4,3
SKR1 40	770	490	6,2

Description	L	H	Weight (kg)
SKR2 05	250	230	1,6
SKR2 10	290	270	2,1
SKR2 15	370	355	2,6
SKR2 20	370	355	2,9
SKR2 30	490	490	4,0
SKR2 40	490	490	4,0

Dimensions in mm