




QUANTUM HR

**Decentralised  
heat recovery unit  
with alternate  
single flow**

  
**aerauliqa<sup>®</sup>**

# QUANTUM HR

## Where to install

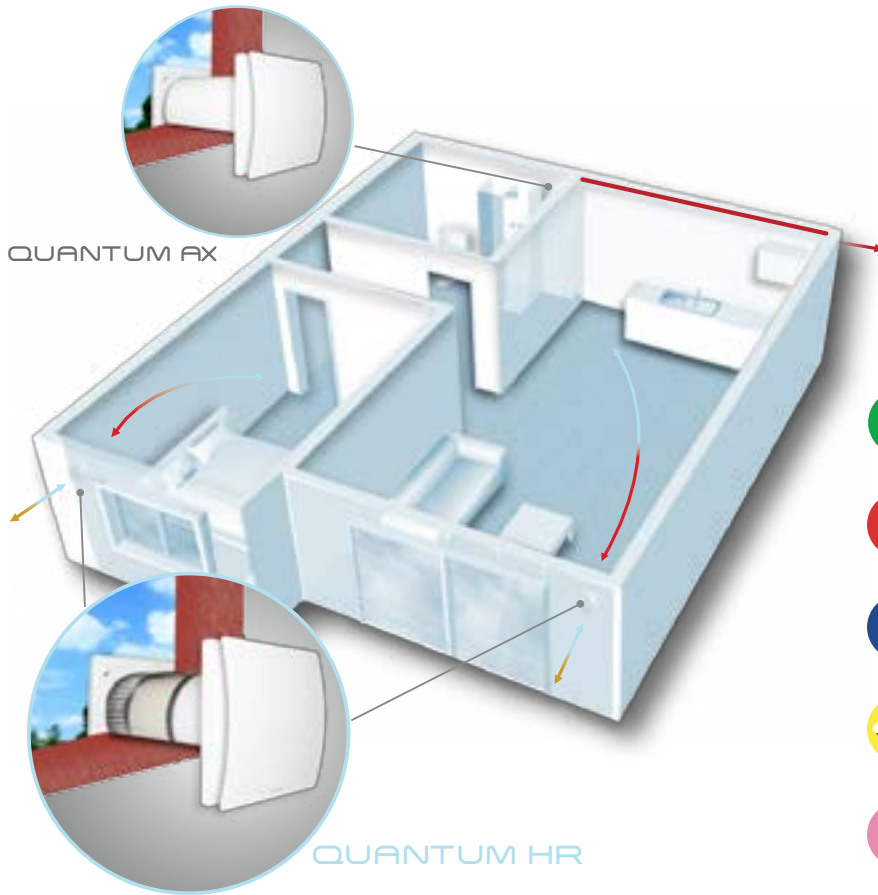

The Quantum HR ventilation units are the heart of the system illustrated nearby: when installed in the “noble rooms”, like living room or bedroom, they provide a continuous and balanced air exchange, having opposite and synchronised air flows which alternate about every 70 seconds.

To extract the stale air from the “technical rooms”, like bathroom/toilet or kitchen, we recommend the usage of the Quantum AX, a decentralised single flow ventilation unit with a very low energy consumption (from 1W).

**QUANTUM HR** makes the difference :



| On the energy bill :  
the lowest energy consumption at the minimum speed, from 1,2W



| On the heating bill :  
up to 90% heat recovery during winter time



| On the time of installation :  
4 times quicker than a centralised ventilation system





| For the building energy certification :  
reduction of the primary energy value for air exchange during winter time



| For our health :  
definitive solution in case of indoor moisture and condensation as well as to reduce the pollutant levels.

## How to install

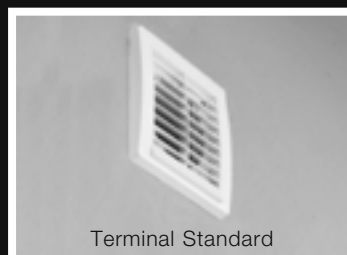

Terminal Standard




Terminal PRO

The unit does not need any condensation drainage.

# QUANTUM HR

## Details

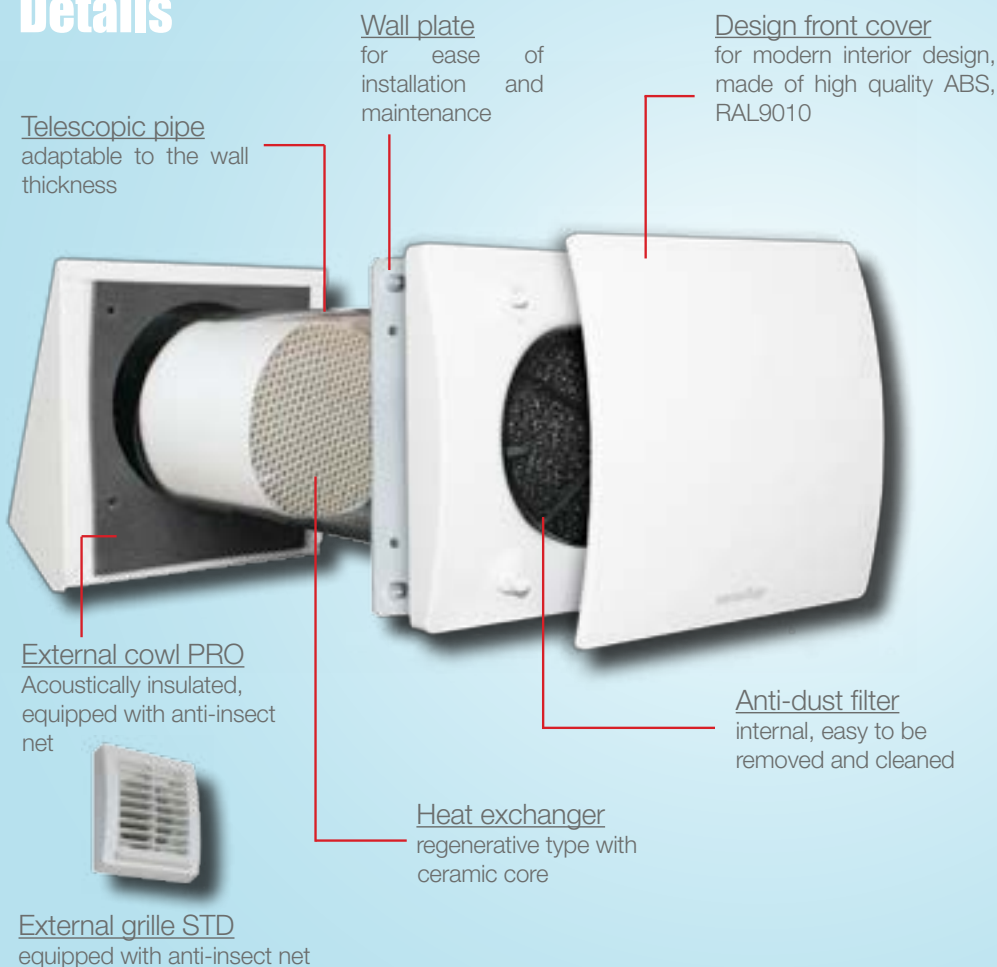

The internal ventilation unit is equipped with:

EC brushless motor  
reversible type with high efficiency, mounted on long life ball bearings and provided with integral thermal protection

Axial impeller  
reversible, with optimised aerodynamic profiles



CTRL-S

Multi-speed operation through CTRL-S :

- 3 speeds
- Free-cooling option (bypass) with LED indicator
- Automatic speed increase by means of ambient sensors (SEN-HY, SEN-PIR or SEN-CO2)
- Control up to 10 units at the same time
- Synchronisation of two or more units, even after one or more units have been switched off or are turned from free-cooling operation to heat exchange

## Simplified maintenance

The unit has been designed, engineered and manufactured with a special attention to its installation and maintenance with the purpose of optimising the activities both of the installer and of the tenant.



The removal of the internal ventilation unit is simplified by the wall plate which allows to repeat this operation without damaging either the casing or the wall



The internal anti-duct filter can be easily removed for cleaning by the tenant



The cleaning/maintenance of the ceramic heat exchanger can be done from inside or outside the wall



# QUANTUM HR

## Available models

Quantum HR 100	Quantum HR 150	Quantum HR 100 PRO	Quantum HR 150 PRO	CTRL-S-P	CTRL-S-I
					
Complete unit ready for installation	Complete unit ready for installation	Complete unit ready for installation	Complete unit ready for installation	Remote control for surface mounting	Remote control for recessed mounting

Pre-installation and completion kits are available upon request.


## Features

Model	Quantum HR 100	Quantum HR 150
Airflow m <sup>3</sup> /h	25/15/10	60/40/20
Power W	2,6/1,7/1,2	3,8/2,3/1,4
Acoustic pressure dB(A) @3m	29/15/10	26/18/10
Ambient temperature °C	-20° +50°	-20° +50°
Thermal efficiency	up to 90%	up to 90%
Marking	CE 	CE 

- rated 220-240 V ~ 50Hz
- air performance measured according to ISO 5801 at 230V 50Hz, air density 1,2 Kg/m<sup>3</sup>
- data measured in the TÜV Rheinland recognised laboratory in Aerauliqa
- pressure sound level at 3m in free field
- certified TÜV Rheinland



## Dimensions

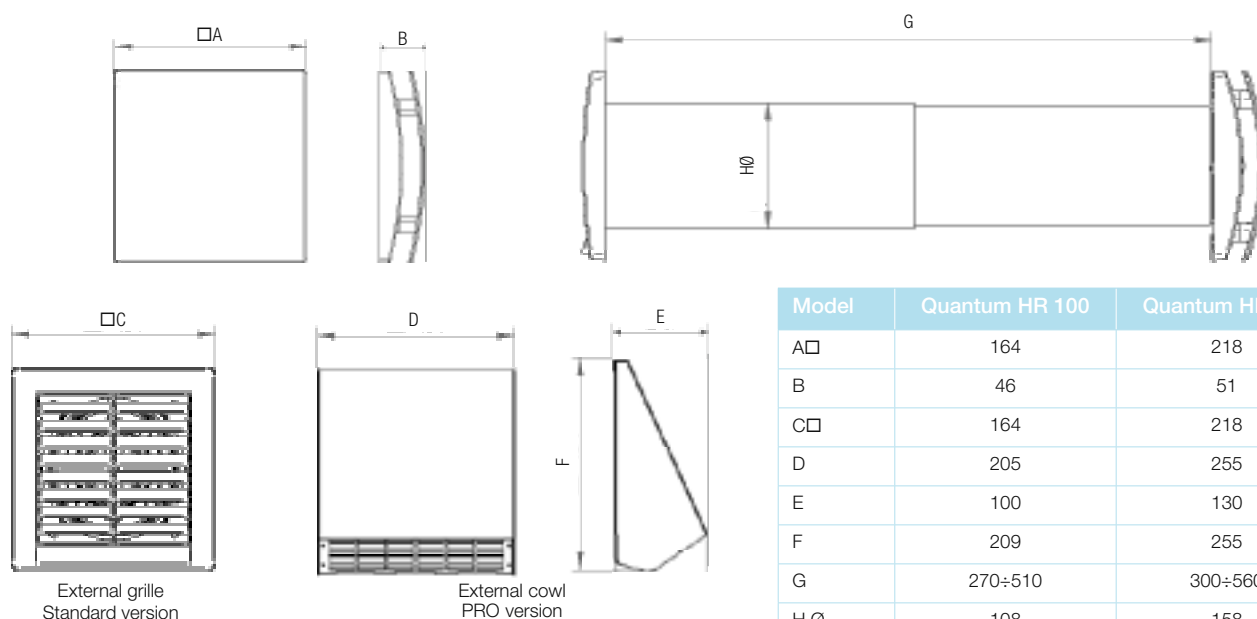

Model	Quantum HR 100	Quantum HR 150
A	164	218
B	46	51
C	164	218
D	205	255
E	100	130
F	209	255
G	270÷510	300÷560
H Ø	108	158

Dimensions in mm



**STYLED, ENGINEERED AND MANUFACTURED IN ITALY**

AERAULIQA SRL, Brescia, Italy - Tel: +39 030 674681 - Fax: +39 030 6872149 - www.aerauliqa.com - info@aerauliqa.it

